


B10



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 089 458 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
04.04.2001 Bulletin 2001/14

(51) Int Cl.7: H04B 7/005

(21) Application number: 99310301.9

(22) Date of filing: 21.12.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Freiberg, Lorenz Fred
Swindon, Wiltshire SN5 6HG (GB)
• Mueckenheim, Jens
90411 Nürnberg (DE)
• Sadler, Richard John
Chippenham, Wiltshire SN14 6YA (GB)

(30) Priority: 01.10.1999 GB 9923207

(71) Applicant: LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(74) Representative: Williams, David John et al
Lucent Technologies UK Limited,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)

(54) Radio telecommunications network

(57) This invention deals with the problem of assigning the power offset between DPCCH and DPDCH. The problem arises from the usage of power control on the DPCCH whereas the quality that is under control (e.g. BER) is given on the DCH/ DPDCH. The power offset must be adjusted in such a way that the transmission power requirements of the DPCCH and the DPDCH are met without wasting too much of the power. An algorithm for assigning the power offsets is disclosed that consists


of two main parts:

Allocation of the specific G-values to every TFC by RRC in the RNC and signalling them to transmitting and receiving side (UE/ NodeB) via higher layer signalling.

Autonomously adjusting of G in PHY regarding the current used TFC in the transmitter. The receiver determines the G-value from the TFC via TFCI signalling.

This algorithm allows efficient setting of dynamically variable offset values without too much signalling overhead. It is compliant to the currently UMTS standard.

FIG. 1

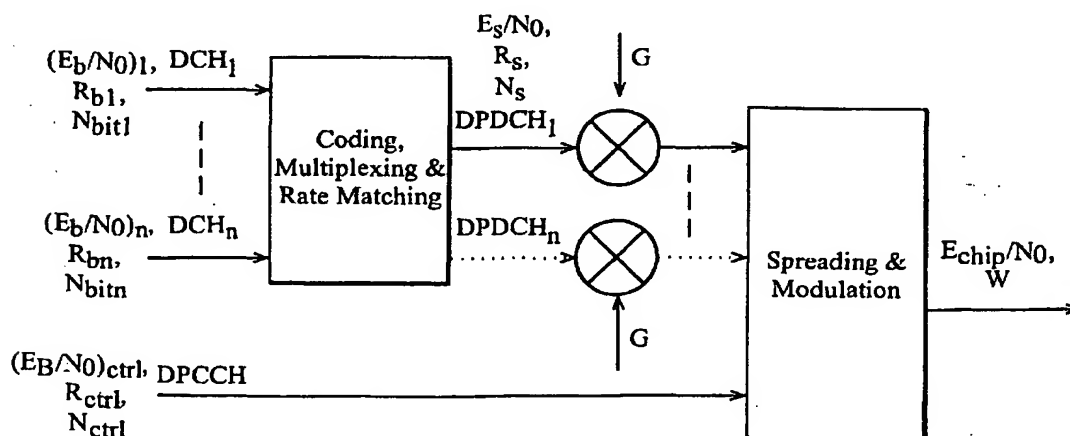

EP 1 089 458 A2

Description

[0001] This invention relates to radio telecommunications networks in which mobile stations communicate with base stations in dedicated physical data channels (DPDCHs) and dedicated physical control channels (DPCCHs), in which transmit power levels in the DPDCHs are set in relation to the transmit power level in the DPCCH by a power offset factor G. An example of such a network is the universal mobile telecommunications systems (UMTS).

[0002] In the UMTS example, the DPDCH carries data of the Dedicated Channels (DCH), i.e. either transmitted user traffic or higher layer control information and the DPCCH carries physical layer control information, i.e. pilot symbols, transmission power control (TPC) bits and the transport format indicator (TFI).

[0003] For implementation reasons the $(E_b/N_0)_{ctrl}$ of the DPCCH is adjusted by the power control (PC) procedures (closed loop, outer loop PC). But it is the E_b/N_0 of each DCH that determines the Quality of Service (QoS) of each Radio Access Bearer (RAB) and hence E_b/N_0 should be controlled by the PC. To solve this issue there is a power offset factor G between DPCCH and DPDCH defined in the 3GPP standards (3GPP UMTS TS 25.213: "Spreading and modulation (FDD)"). Desirably, the value of G should be adjusted in such a way that the ratio of bit energy to background noise density (E_b/N_0), and hence the transmission power requirements, of the DPCCH and the DPDCH, are met without wasting too much power. For example a high data rate DPDCH has to be transmitted with a higher transmission power than the low data rate DPCCH.

[0004] Broadly, against this background the invention provides a radio telecommunications network, in which mobile stations communicate with base stations in dedicated physical data channels (DPDCHs) and a dedicated physical control channel (DPCCH), transmit power levels in the DPCCH being controlled by detecting received signal levels in the DPCCH, and transmit power levels in the DPDCHs being set in relation to the transmit power level in the DPCCH for a traffic format combination I, by an amplitude factor G(I) given:

$$G^2(I) \geq \frac{\sum_{i=1}^{m(I)} (E_b/N_0)_i \cdot N_{bit,i}(I)}{N_{ctrl} \cdot (E_b/N_0)_{ctrl} \cdot m(I)}$$

in the uplink

$$G^2(I) \geq \frac{\sum_{i=1}^{m(I)} (E_b/N_0)_i \cdot N_{bit,i}(I)}{N_s(I) \cdot (E_b/N_0)_{ctrl} \cdot m(I)}$$

in the downlink.

[0005] Where $(E_b/N_0)_i$ is the ratio of bit energy to background noise density which is required to achieve a class of service dependent desired bit error rate for data channel i

$N_{bit,i}$ is the number of bits desired to be sent per frame in channel i

N_{ctrl} is the number of bits per frame in the control channel

$(E_b/N_0)_{ctrl}$ is the ratio of bit energy to background noise density which is required to achieve a desired bit error rate in the control channel

$m(I)$ is the number of multi-codes; and

$N_s(I)$ is the total number of symbols per frame in the data channel.

[0006] In more detail, the relation between the $(E_b/N_0)_{ctrl}$ of the DPCCH and the E_b/N_0 of each DCH varies depending on the currently used mix of data rates of the DCH which is given by the Transport Format Combination (TFC). Detailed investigations reveal that there is a fixed relation between G and TFC. Therefore by properly setting of G, the E_b/N_0 of the DCH can be controlled using $(E_b/N_0)_{ctrl}$ of the DPCCH, too.

[0007] A preferred embodiment of the invention therefore includes a stored table of values of $(E_b/N_0)_i$ for different combinations of class of service, spreading factor and rate matching levels, the value of $(E_b/N_0)_i$ used to set the transmit power level in the DPDCH being selected according to the spreading factor and the rate matching level resulting from a selected traffic format combination (TFC) /.

[0008] Since the values of E_b/N_0 together with the TFCS are known, the power offset G could, perhaps, be adjusted by the transmitting side (UE or NodeB) autonomously. However there are some reasons to not allow the transmitting

side to calculate the value of G by itself:

[0009] If the transmitter has to decide by itself about the used power offset then the E_b/N_0 values for all services has to be known. They are not only dependent on the service but also on the despreading and decoding method in the receiver (manufacturer dependent), the environment etc.

[0010] For decoding (e.g. normalizing the channel estimate) the receiving side has to know the G, too. If G is calculated autonomously in the transmitter the same value has to be calculated also in the receiver. Due to different calculation methods, e.g. different accuracy there might be different results in transmitter and receiver.

[0011] In some situations (e.g. soft Handover) other offsets has to be adjusted. This only can be decided in the network.

[0012] If the transmitter can decide the power offset by itself, the algorithm has to be standardized. This limits the flexibility for enhancing of the algorithms.

[0013] Most preferably, therefore, the contents of the table is sent to the mobile station and to the base station from a radio network controller (RNC), the mobile station and the base station being operative to calculate the spreading factor and rate matching levels resulting from a desired TFC, to select the (E_b/N_0) s appropriate to the classes of service, the spreading factor and the rate matching levels, and to calculate the respective amplitude factor G.

[0014] Reference is made to the following papers:

3GPP UMTS TS 25.214: "Physical Layer Procedures (FDD)";

O. Salonaho, J. Laakso: "Flexible Power Allocation For Physical Control Channel In Wideband CDMA," IEEE VTC'99; and

Ericsson: "Amplitude differences between uplink DPCCH and DPDCHs," TDoc 3GPP TSG-RAN WG1 347/99

[0015] The invention also extends to a method of operating a radio telecommunications network, in which mobile stations communicate with base stations in dedicated physical data channels (DPDCHs) and a dedicated physical control channel (DPCCH), the method comprising controlling transmit power levels in the DPCCH by detecting received signal levels in the DPCCH, and setting transmit power levels in the DPDCHs in relation to the transmit power level in the DPCCH for a traffic format combination I, by an amplitude factor G(I) given:

$$G^2(I) \geq \frac{\sum_{i=1}^{n(I)} (E_b/N_0)_i \cdot N_{bit}(I)}{N_{ctrl} \cdot (E_b/N_0)_{ctrl} \cdot m(I)}$$

in the uplink

$$G^2(I) \geq \frac{\sum_{i=1}^{n(I)} (E_b/N_0)_i \cdot N_{bit}(I)}{N_s(I) \cdot (E_b/N_0)_{ctrl} \cdot m(I)}$$

in the downlink.

[0016] Where $(E_b/N_0)_i$ is the ratio of bit energy to background noise density which is required to achieve a class of service dependent desired bit error rate for data channel i

N_{bit} is the number of bits desired to be sent per frame in channel i

N_{ctrl} is the number of bits per frame in the control channel

$(E_b/N_0)_{ctrl}$ is the ratio of bit energy to background noise density which is required to achieve a desired bit error rate in the control channel

$m(I)$ is the number of multi-codes; and

$N_s(I)$ is the total number of symbols per frame in the data channel.

[0017] A preferred embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a block diagram of a UMTS model, transmitter side in a radio telecommunications network embodying the invention; and

Figure 2 shows an overview of an embodiment of the proposed power assignment algorithm.

[0018] Broadly the network deals with the problem of assigning the power offset between DPCCH and DPDCH. The problem arises from the usage of power control on the DPCCH whereas the quality that is under control (e.g. BER) is given on the DCH/ DPDCH. In this embodiment, the power is adjusted in such a way that the transmission power requirements of the DPCCH and the DPDCH are met without wasting too much power.

[0019] An algorithm for assigning the power offsets consists of two main parts:

1. Allocation of the specific G-values to every TFC, i.e. to every combination of class of service, spreading factor and rate matching level resulting from the TFCs. These may be allocated by RRC in the RNC and signalled to transmitting and receiving side (UE/ NodeB) via higher layer signalling. Or alternatively, to save on calculations necessary in the RRC, the table of values of E_b/N_0 is stored for each combination of classes of service, spreading factor and rate matching level resulting from every TFC. The contents of the table are transmitted to the transmitting side and the receiving side and the calculation is done there for the particular TFC to be used.

2. Autonomous adjustment of G in PHY regarding the current used TFC in the transmitter. The receiver determines or calculates the G-value from the TFC via TFCI signalling.

[0020] This algorithm allows efficient setting of dynamically variable offset values without too much signalling overhead. It is compliant to the currently UMTS standard.

[0021] The UMTS physical layer model for the uplink and for the downlink is depicted in FIG. 2. The DCH of one user are coded and multiplexed into one or several DPDCH. Additional rate matching is applied to balance the E_b/N_0 requirements of different DCH. The DPDCH are weighted by an amplitude factor G, multiplexed with the DPCCH and spread to a chip rate W.

[0022] The description of the variables is as follows:

DCH_i is described by $(E_b/N_0)_i$ and data rate R_{bi} . The number of bits (transport block set size) is N_{biti} . The current data rate is given by $R_{bi} = N_{biti}/10 \text{ ms}$.

All DPDCH_i have the same E_s/N_0 and the same symbol rate R_s . The number of symbols is N_s . The number of used multi-codes is m.

[0023] The DPCCH is described by $(E_b/N_0)_{ctrl}$ and control bit rate R_{ctrl} . The number of control bits is $N_{ctrl} = N_{pilot} + N_{TPC} + N_{TFCI}$ (pilot, TPC and TFCI).

[0024] The relation between $(E_b/N_0)_i$ of DCH_i and E_s/N_0 is given by

$$\left(\frac{E_b}{N_0} \right)_i \cdot N_{biti} = \frac{E_s}{N_0} \cdot N_s \cdot m \quad (1)$$

[0025] Where $(E_b/N_0)_i$ is the ratio of bit energy to background noise density which is required to achieve a class of service dependent desired bit error rate for data channel i

N_{biti} is the number of bits desired to be sent per frame in channel i

E_s/N_0 is the ratio of symbol energy to background noise density

N_{si} is the number of symbols required for channel after coding and rate matching.

[0026] The number of symbols N_s for one DPDCH is calculated by the sum of all N_{si} weighted by the number of multicode m

$$N_s = \sum_{i=1}^n N_{si} / m \quad (2)$$

[0027] In the uplink the DPCCH is code-multiplexed to the DPDCH. Thus, the relation between $(E_b/N_0)_{ctrl}$ of the DPCCH and E_s/N_0 of one DPDCH in the uplink is given by

$$\frac{E_s}{N_0} \cdot N_s = \left(\frac{E_b}{N_0} \right)_{ctrl} \cdot N_{ctrl} \cdot G^2 \quad (3)$$

where

N_{ctrl} is the number of bits per frame in the control channel

$(E_b/N_0)_{ctrl}$ is the ratio of bit energy to background noise density which is required to achieve a desired bit error rate in the control channel, and

$N_s(l)$ is the total number of symbols per frame in the data channel.

[0028] If there is no data to send on the DPDCH it is switched off and hence $G = 0$.

[0029] From eq. (1) - eq. (3) follows the relation between $(E_b/N_0)_{ctrl}$ and $(E_b/N_0)_i$ of all DCH in the uplink

$$\left(\frac{E_b}{N_0} \right)_{ctrl} = \frac{\sum_{i=1}^n (E_b/N_0)_i \cdot N_{bit,i}}{N_{ctrl} \cdot G^2 \cdot m} \quad (4)$$

[0030] In the downlink, time-multiplex between DPDCH and DPCCH is used. Hence, the relation between $(E_b/N_0)_{ctrl}$ of the DPCCH and E_b/N_0 of one DPDCH in the downlink is given by

$$\frac{E_s}{N_0} = \left(\frac{E_b}{N_0} \right)_{ctrl} \cdot G^2 \quad (5)$$

[0031] From eq. (1), eq. (2) and eq. (5) follows the relation between $(E_b/N_0)_{ctrl}$ and $(E_b/N_0)_i$ of all DCH in the downlink

$$\left(\frac{E_b}{N_0} \right)_{ctrl} = \frac{\sum_{i=1}^n (E_b/N_0)_i \cdot N_{bit,i}}{N_s \cdot G^2 \cdot m} \quad (6)$$

[0032] The power control adjusts the transmission power on the DPCCH and hence $(E_b/N_0)_{ctrl}$. If the power offset factor G between DPDCH and DPCCH is chosen that eq. (4) (uplink) or eq. (6) (downlink) is fulfilled for every combination of N_{bit} (TFCI) the value of $(E_b/N_0)_{ctrl}$ remains constant even in the case of variable data rates without any extra signalling beyond TFCI.

[0033] The relation between G and the β -factors mentioned in the standards referred to above is simply $G = \beta_1/\beta_{ctrl}$. (Note: in the present arrangement, all active DPDCHs get the same power offset). The channel with maximum power always has $\beta = 1.0$ and the others have $\beta \leq 1.0$. The β -values are quantized into 4 bits, and the quantization steps are given in 3GPP UMTS TS 25.213: "Spreading and modulation (FDD)".

[0034] Figure 2 gives an overview of the proposed rate matching algorithm. It consists of two main parts, which are defined as follows:

[0035] Radio Resource Control function that is located in the Radio Network Controller (RNC) for both uplink as well as downlink.

[0036] Layer 1 functions that are located in the transmitter side, i.e. in the NodeB for the downlink and in the UE for the uplink, and in the receiving side, i.e. the UE for the downlink and the NodeB for the uplink.

[0037] The power assignment algorithm is as follows:

[0038] Inputs to the algorithm are the required $(E_b/N_0)_i$ for each DCH_i and the number of data bits per data frame $N_{bit}(l)$ of DCH_i for each transport format combination TFC(l). The number of symbols $N_s(l)$ and the number of DPDCH (i.e. multicodes) $m(l)$ is also known. The number of control bits N_{ctrl} is assumed fixed. The $(E_b/N_0)_{ctrl}$ of the DPCCH is determined by the required BER of e.g. the TPC or TFCI bits. It depends on several conditions, e.g. whether the UE is in soft handoff.

[0039] The power offsets $G(l)$ for each TFC(l) will be determined. Using eq. (4) and eq. (6) the following assignment formulation can be used:

$$G^2(l) \geq \frac{\sum_{i=1}^{n(l)} (E_b/N_0)_i \cdot N_{h_{lm}}(l)}{N_{ctrl} \cdot (E_b/N_0)_{ctrl} \cdot m(l)}$$

in the uplink

$$G^2(l) \geq \frac{\sum_{i=1}^{n(l)} (E_b/N_0)_i \cdot N_{h_{lm}}(l)}{N_N(l) \cdot (E_b/N_0)_{ctrl} \cdot m(l)}$$

in the downlink.

[0040] Either a complete set of values of G for all TFCs can be sent to the mobile station and the RNC or a complete table of E_b/N_0 for all TFCs can be sent. Discrete values of $G(l)$ may be used to save implementation effort and transmission overhead. Then the next higher valid $G(l)$ must be chosen, which implies a slight waste of transmission power. Equal $G(l)$ might be related to different TFC(l).

[0041] If there are fewer values of $G(l)$ allowed than the number of TFC(l), the procedure is as follows: At first the TFC(l) that have similar $G(l)$ are grouped into the same group. The number of groups equals or is less than the number of allowed G -values. Then the highest $G(l)$ is taken and connected to the group of TFC. Depending on the number of allowed $G(l)$ there is a higher waste of transmission power.

[0042] The calculated $G(l)$ or table of E_b/N_0 will be transmitted to both the transmitting and the receiving side together with the TFC(l) using higher layer signalling. From this point, there is a fixed relation between the TFC(l) and the $G(l)$.

[0043] At the transmitting side the physical layer adjusts autonomously the power offset $G(l)$ that is related to the chosen TFC(l) for transmission. The β -factor can be used, but the algorithm is not limited to it. The exact method depends on the implementation. The TFC(l) is coded into the transport format combination indicator TFCI that will be transmitted on the DPCCCH to the receiving side.

[0044] From the received TFCI the physical layer in the receiver knows the TFC(l) of the data frame that is currently used. Because inner loop power control adjusts the transmission power in such a way that $(E_b/N_0)_{ctrl}$ of the DPCCCH remains constant the TFCI can be properly decoded even in case of changing the data rate (and TFC) of the DCHs. The TFC information will normally be used to decode and demultiplex the data blocks of the DCH currently in use. Moreover, in the embodiment, the receiver knows implicitly $G(l)$ from TFC(l) and hence can use this parameter for detection of the transmitted data (e.g. normalizing the channel estimate).

[0045] Variations in the environment, e.g. due to soft handover, changes the value of $(E_b/N_0)_{ctrl}$ of the DPCCCH. Variations of the user behaviour, e.g. changing the TFCS due to RAB procedures changes the values of $(E_b/N_0)_i$ and/or $N_{bit}(l)$ of DCH_i for each TFC(l). Then, the RNC calculates new values $G(l)$ and send them to both, the transmitting and receiving side again via higher layer signalling.

[0046] The power offset assignment algorithm solves the problem of adjusting the power offset between DPCCCH and DPDCH. It has the following properties:

[0047] It consists of two main parts: 1. Allocation of the specific G -values to every TFC in the RNC and signalling them to transmitting and receiving side via higher layer signalling. 2. Autonomously adjusting of G regarding the current used TFC in the transmitter. The receiver determines the G -value from the TFC via TFCI signalling.

[0048] Transmission of the G -values is only necessary for initialisation, e.g. when connection setup or reconfiguration. During normal transmission the adjusting is done regarding the current assigned TFC. Hence no additional signalling beyond TFCI is necessary.

[0049] It can be used for adjusting G in the uplink and in the downlink.

[0050] Different power offset values for Pilot, TPC and TFCI can be supported by handling them as separate channels with $N_{ctrl1}=N_{pilot}$, $N_{ctrl2}=N_{TPC}$ and $N_{ctrl3}=N_{TFCI}$.

[0051] The algorithm supports the usage of limited numbers of G -values, e.g. due to quantization or reduced signalling overhead.

Claims

1. A radio telecommunications network, in which mobile stations communicate with base stations in dedicated physical data channels (DPDCHs) and a dedicated physical control channel (DPCCH), transmit power levels in the DPCCH being controlled by detecting received signal levels in the DPCCH, and transmit power levels in the DPDCHs being set in relation to the transmit power level in the DPCCH for a traffic format combination I, by an amplitude factor G(I) given:

$$G^2(I) \geq \frac{\sum_{i=1}^{n(I)} (E_b/N_0)_i \cdot N_{bit}(I)}{N_{ctrl} \cdot (E_b/N_0)_{ctrl} \cdot m(I)}$$

in the uplink

$$G^2(I) \geq \frac{\sum_{i=1}^{n(I)} (E_b/N_0)_i \cdot N_{bit}(I)}{N_s(I) \cdot (E_b/N_0)_{ctrl} \cdot m(I)}$$

in the downlink.

Where

$(E_b/N_0)_i$ is the ratio of bit energy to background noise density which is required to achieve a class of service dependent desired bit error rate for data channel i

N_{bit} is the number of bits desired to be sent per frame in channel i

N_{ctrl} is the number of bits per frame in the control channel

$(E_b/N_0)_{ctrl}$ is the ratio of bit energy to background noise density which is required to achieve a desired bit error rate in the control channel

$m(I)$ is the number of multi-codes; and

$N_s(I)$ is the total number of symbols per frame in the data channel.

2. A radio telecommunications network, as claimed in claim 1, including a stored table of values of $(E_b/N_0)_i$ for different combinations of class of service, spreading factor and rate matching levels, the value of $(E_b/N_0)_i$ used to set the transmit power level in the DPDCH being selected according to the spreading factor and the rate matching level resulting from a selected traffic format combination (TFC) /.
3. A radio telecommunications network as claimed in claim 2, wherein the contents of the table is sent to the mobile station and to the base station from a radio network controller (RNC), the mobile station and the base station being operative to calculate the spreading factor and rate matching levels resulting from a desired TFC, to select the $(E_b/N_0)_i$ s appropriate to the classes of service, the spreading factor and the rate matching levels, and to calculate the respective amplitude factor G.
4. A radio telecommunications network as claimed in claim 2 or 3, wherein there are fewer discrete values of G(I) allowed than the number of TFC(I), TFC(I) that have similar G(I) being grouped into the same group, the number of groups being equal to or is less than the number of allowed G-values, the highest G(I) in the group being taken and connected to the group of TFC.
5. A method of operating a radio telecommunications network, in which mobile stations communicate with base stations in dedicated physical data channels (DPDCHs) and a dedicated physical control channel (DPCCH), the method comprising controlling transmit power levels in the DPCCH by detecting received signal levels in the DPCCH, and setting transmit power levels in the DPDCHs in relation to the transmit power level in the DPCCH for a traffic format combination I, by an amplitude factor G(I) given:

$$G^2(l) \geq \frac{\sum_{i=1}^{n(l)} (E_b/N_0)_i \cdot N_{bit}(l)}{N_{ctrl} \cdot (E_b/N_0)_{ctrl} \cdot m(l)}$$

in the uplink

$$G^2(l) \geq \frac{\sum_{i=1}^{n(l)} (E_b/N_0)_i \cdot N_{bit}(l)}{N_s(l) \cdot (E_b/N_0)_{ctrl} \cdot m(l)}$$

in the downlink.

Where

$(E_b/N_0)_i$ is the ratio of bit energy to background noise density which is required to achieve a class of service dependent desired bit error rate for data channel i

N_{bit} is the number of bits desired to be sent per frame in channel i

N_{ctrl} is the number of bits per frame in the control channel

$(E_b/N_0)_{ctrl}$ is the ratio of bit energy to background noise density which is required to achieve a desired bit error rate in the control channel

$m(l)$ is the number of multi-codes; and

$N_s(l)$ is the total number of symbols per frame in the data channel.

6. A method as claimed in claim 5, including storing a table of values of $(E_b/N_0)_i$ for different combinations of class of service, spreading factor and rate matching levels, and selecting the value of $(E_b/N_0)_i$ used to set the transmit power level in the DPDCH according to the spreading factor and the rate matching level resulting from a selected traffic format combination (TFC) /.
7. A method as claimed in claim 6, wherein the contents of the table is sent to the mobile station and to the base station from a radio network controller (RNC), and the mobile station and the base station operate to calculate the spreading factor and rate matching levels resulting from a desired TFC, to select the $(E_b/N_0)_i$ s appropriate to the classes of service, the spreading factor and the rate matching levels, and to calculate the respective amplitude factor G .
8. A method as claimed in claim 6 or 7, wherein there are fewer discrete values of $G(l)$ allowed than the number of TFC(l), TFC(l) that have similar $G(l)$ being grouped into the same group, the number of groups being equal to or is less than the number of allowed G -values, the highest $G(l)$ in the group being taken and connected to the group of TFC.

FIG. 1


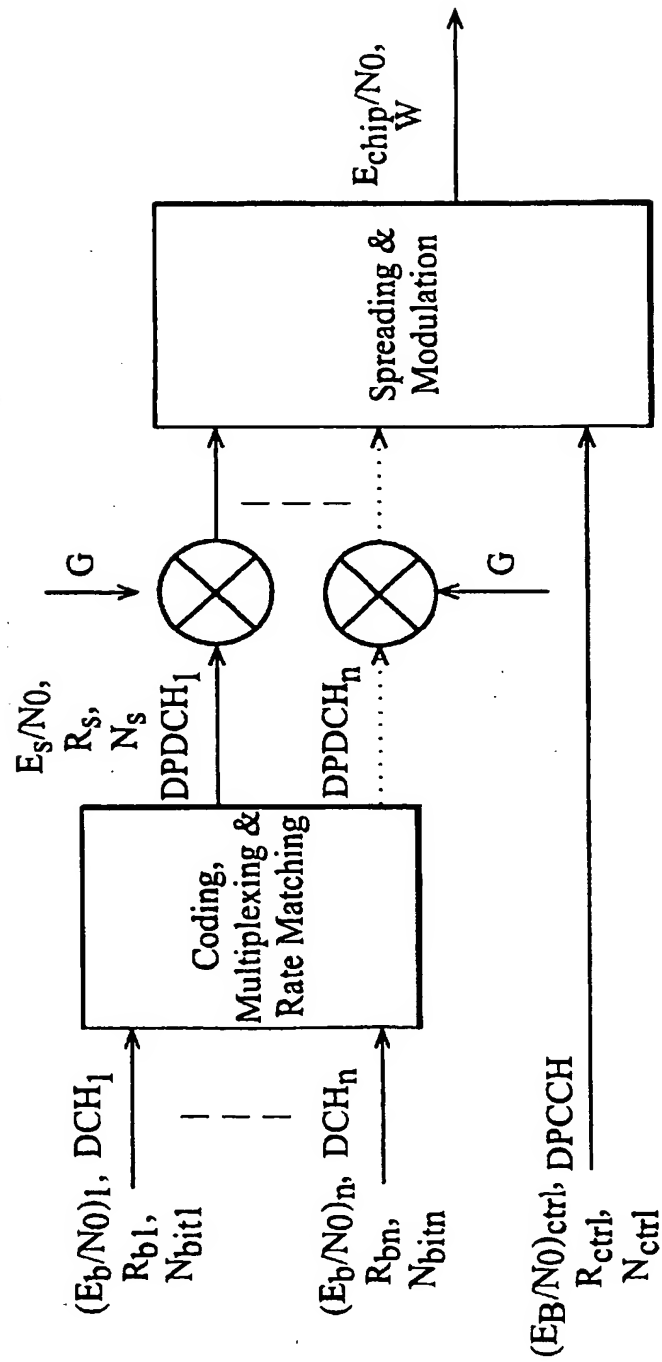


FIG. 2



(19)

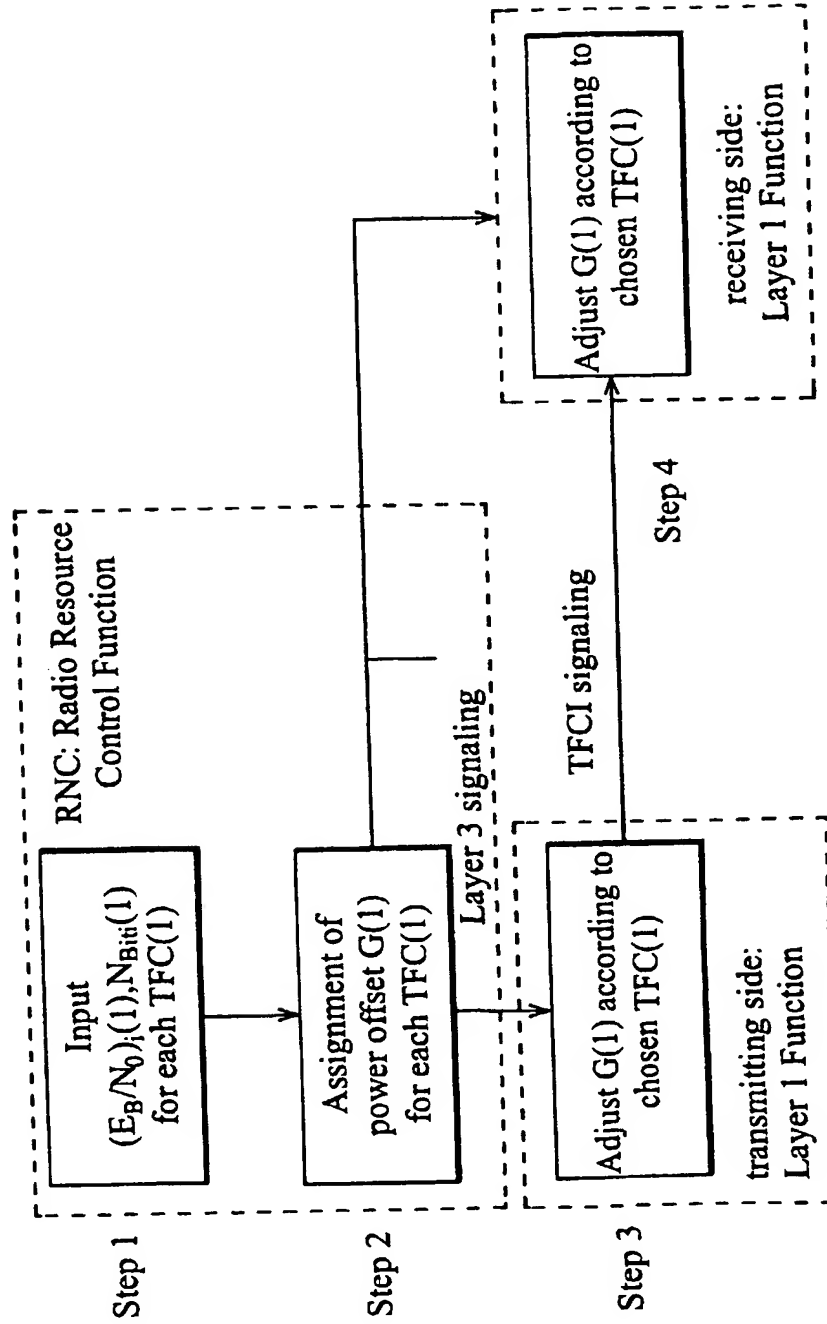

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 089 458 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
08.08.2001 Bulletin 2001/32

(51) Int Cl.7: **H04B 7/005**

(43) Date of publication A2:
04.04.2001 Bulletin 2001/14

(21) Application number: 99310301.9

(22) Date of filing: 21.12.1999

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Freiberg, Lorenz Fred
Swindon, Wiltshire SN5 6HG (GB)
• Mueckenheim, Jens
90411 Nürnberg (DE)
• Sadler, Richard John
Chippenham, Wiltshire SN14 6YA (GB)

(30) Priority: 01.10.1999 GB 9923207

(71) Applicant: LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(74) Representative: Williams, David John et al
Lucent Technologies UK Limited,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)

(54) Radio telecommunications network


(57) This invention deals with the problem of assigning the power offset between DPCCH and DPDCH. The problem arises from the usage of power control on the DPCCH whereas the quality that is under control (e.g. BER) is given on the DCH/ DPDCH. The power offset must be adjusted in such a way that the transmission power requirements of the DPCCH and the DPDCH are met without wasting too much of the power. An algorithm for assigning the power offsets is disclosed that consists

of two main parts:

Allocation of the specific G-values to every TFC by RRC in the RNC and signalling them to transmitting and receiving side (UE/ NodeB) via higher layer signalling.

Autonomously adjusting of G in PHY regarding the current used TFC in the transmitter. The receiver determines the G-value from the TFC via TFCI signalling.

This algorithm allows efficient setting of dynamically variable offset values without too much signalling overhead. It is compliant to the currently UMTS standard.

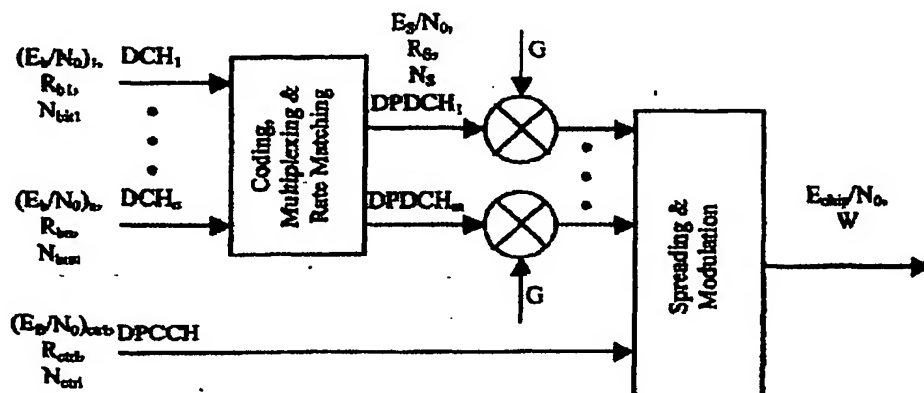**FIG. 1**
EP 1 089 458 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 31 0301

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 98 58461 A (ERICSSON TELEFON AB L M) 23 December 1998 (1998-12-23) * abstract * * page 3, line 8 - line 25 * * page 4, line 29 - page 6, line 11 * * page 7, line 1 - line 21; figure 2 * * page 8, line 19 - page 9, line 15; figure 3 * * page 12, line 7 - line 14; figure 7 *	1-3,5-7	H04B7/005
A,D	SALONAH O ET AL: "FLEXIBLE POWER ALLOCATION FOR PHYSICAL CONTROL CHANNEL IN WIDEBAND CDMA" HOUSTON, TX, MAY 16 - 20, 1999, NEW YORK, NY: IEEE, US, vol. CONF. 49, 16 May 1999 (1999-05-16), pages 1455-1458, XP000903286 ISBN: 0-7803-5566-0 * abstract * * page 1455, left-hand column, line 1 - right-hand column, last line; figure 1 *	1-3,5-7	
A,D	ERICSSON: "Amplitude differences between uplink DPCCCH and DPDCCHs" TSG-RAN WG1#4(99)347, 'Online! 18 - 20 April 1999, XP002167844 Shin-Yokohama, Japan Retrieved from the Internet: <URL:http://www.3gpp.org/ftp/tsg_ran/WG1_R L1/TSGR1_04/Docs/Pdfs/R1-99347.PDF> 'retrieved on 2001-05-18! * page 1, line 1 - line 8; figure 1 * * page 4, last paragraph - page 5, last line; figures 5,6 *	1-3,5-7	H04B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15 June 2001	Examiner Sieben, S
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons * : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.02 (P/0407)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 31 0301

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-06-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9858461 A	23-12-1998	US 6173162 B	09-01-2001
		AU 8050198 A	04-01-1999
		CN 1267410 T	20-09-2000
		EP 0990314 A	05-04-2000

EPO FORM P04US

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)